


61316

Hitch application

Chev/GMC Front Mount Camper Tiedown

For specific fit, see current fit list
in our catalogue at www.dsphitches.com

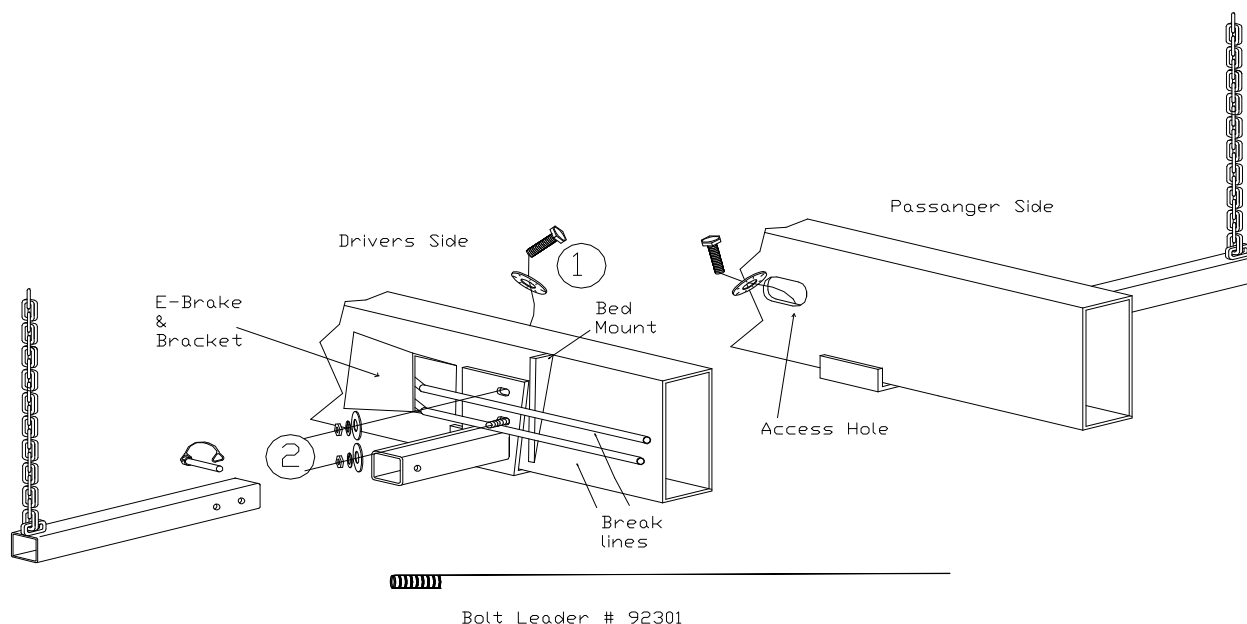

Parts List		Contents of Bolt Pack # 61316/B		Tools Required
1	Mainbody Part# 61316/MBP	2	Bolt Leaders 24"	11/16" Socket or Wrench 100 FT/LB Torque Wrench
1	Mainbody Part # 61316/MBD	4	Flat Washer 1/2", UNC, Grade 5, Plated	
2	Tube Chains 17"	4	Hex Bolts 1/2 X 1-1/2, UNC, Grade 5, Plated	
1	Bolt Pack 61316/B	4	Hex Nut 1/2", UNC, Grade 5, Plated	
1	Instructions	4	Lock Washer 1/2", UNC, Grade 5, Plated	
Shipping Weight	28.4 lbs 12.9 kg	2	Quick Pins	No Drill Application
		4	Spacer #91110	

1. Locate tiedown and disconnect the emergency brake cable.
2. Install hex bolts with spacer #91110 using the supplied bolt leaders through existing holes. Leave the bolt leaders attached
3. Hold tiedown mainbody part onto holes on truck frame and fish bolt leader through hole, pulling bolts into place
4. Remove bolt leaders and fasten bolts with supplied flat washer and lock washer and nut. Tighten all mounting fasteners to the correct torque specification listed below.
5. Repeat on other side of truck.
6. Reconnect emergency brake cable.

Bolt Size	Grade 5 Torque	Metric	Grade 8.8 Torque
3/8	30 Ft. Lb	8 mm	18 Ft. Lb.
7/16	54 Ft. Lb	10 mm	36 Ft. Lb.
1/2	72 Ft. Lb.	12 mm	75 Ft. Lb.
5/8	150 Ft. Lb	14 mm	103 Ft. Lb.
3/4	245 Ft. Lb	Maximum torque for weld or weld nuts is 38 FT/Lb	

Warning: Check Fasteners annually or before usage, if the Tiedown is damaged replacement may be necessary.

DO NOT drill or alter this product. This product is only intended for the application listed above, see vehicle owner's manual for maximum camper capacity (GVWR). This product is intended for usage with the correct towing accessories and not to be used with tow ropes, cables, chains or any type of stretch or elastic rope.

DSP Hitches are manufactured by 2114391 Alberta Ltd. Edmonton Alberta, Canada

For more information on DSP and DSP products call 1-800-265-3377 or visit us at www.dsphitches.com